

QR Code & RFID Card Reader

Applied with EM card / Mifare card / Felica card / DESFire card / QR code / Barcode



PQ-510




Features

- It can connect off-line and on-line controller.
- Scan the Barcode or QR code to record the access events.
- Built-in buzzer for sound notification.
- Provides tamper switch.
- Ability to read multiple formats.
- With CPU watch-dog function to prevent malfunction.
- Provide OEM/ODM projects development.

Specification

- RFID frequency : 125KHz ASK / 125KHz FSK / 13.56MHz
- Applicable cards : EM 4001, EM 4102 compatible / TEMIC 5557/ Mifare S50, S70, Ultra Light
- Output format (Interface) : RS-232 / RS-485 / Wiegand 26/34bits
- Mounting : Surface Mount
- Power input : DC 12V

Dimension Unit:mm[inch]

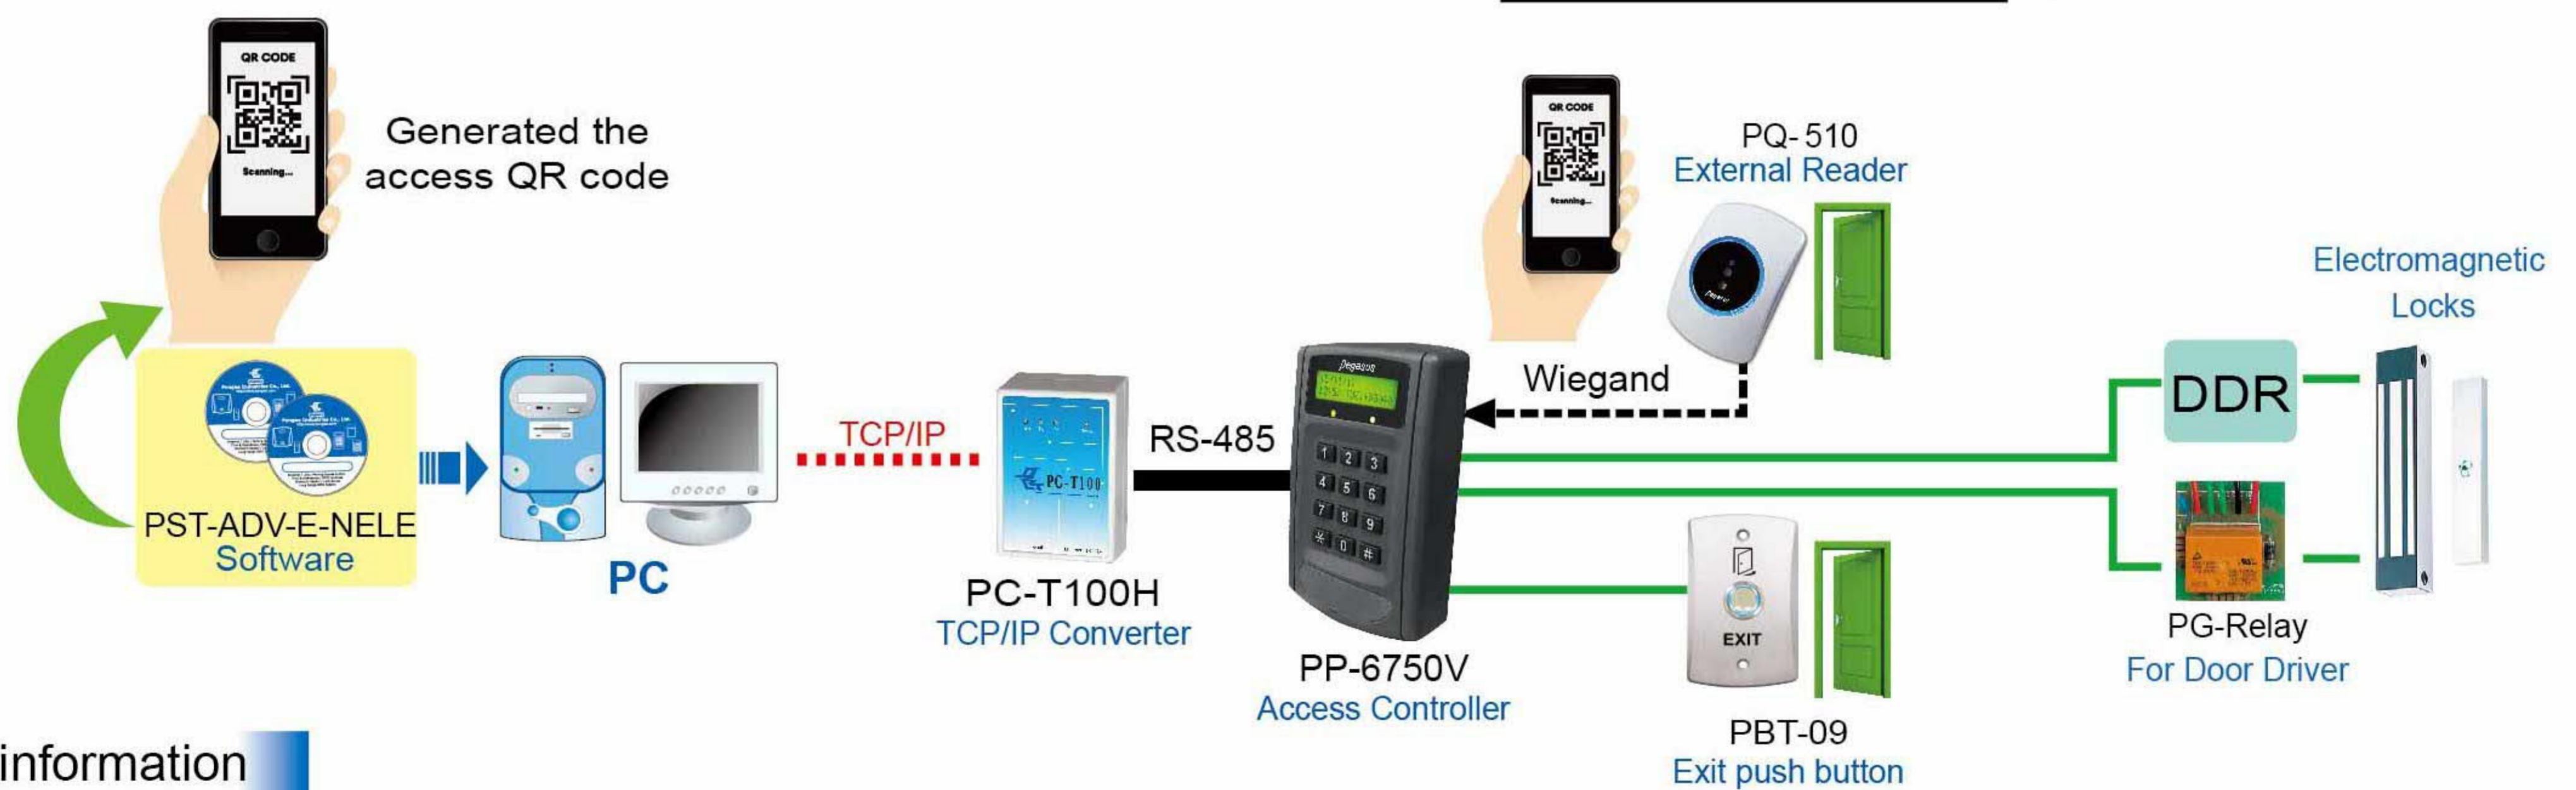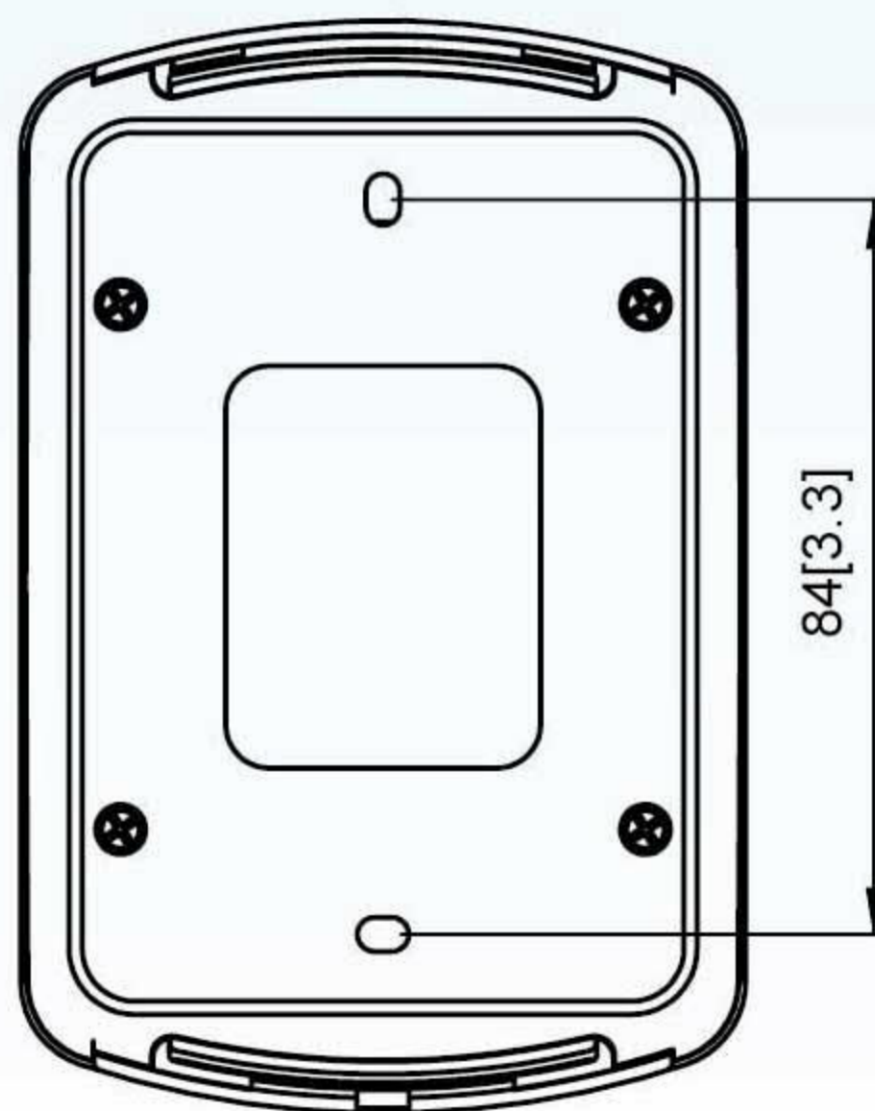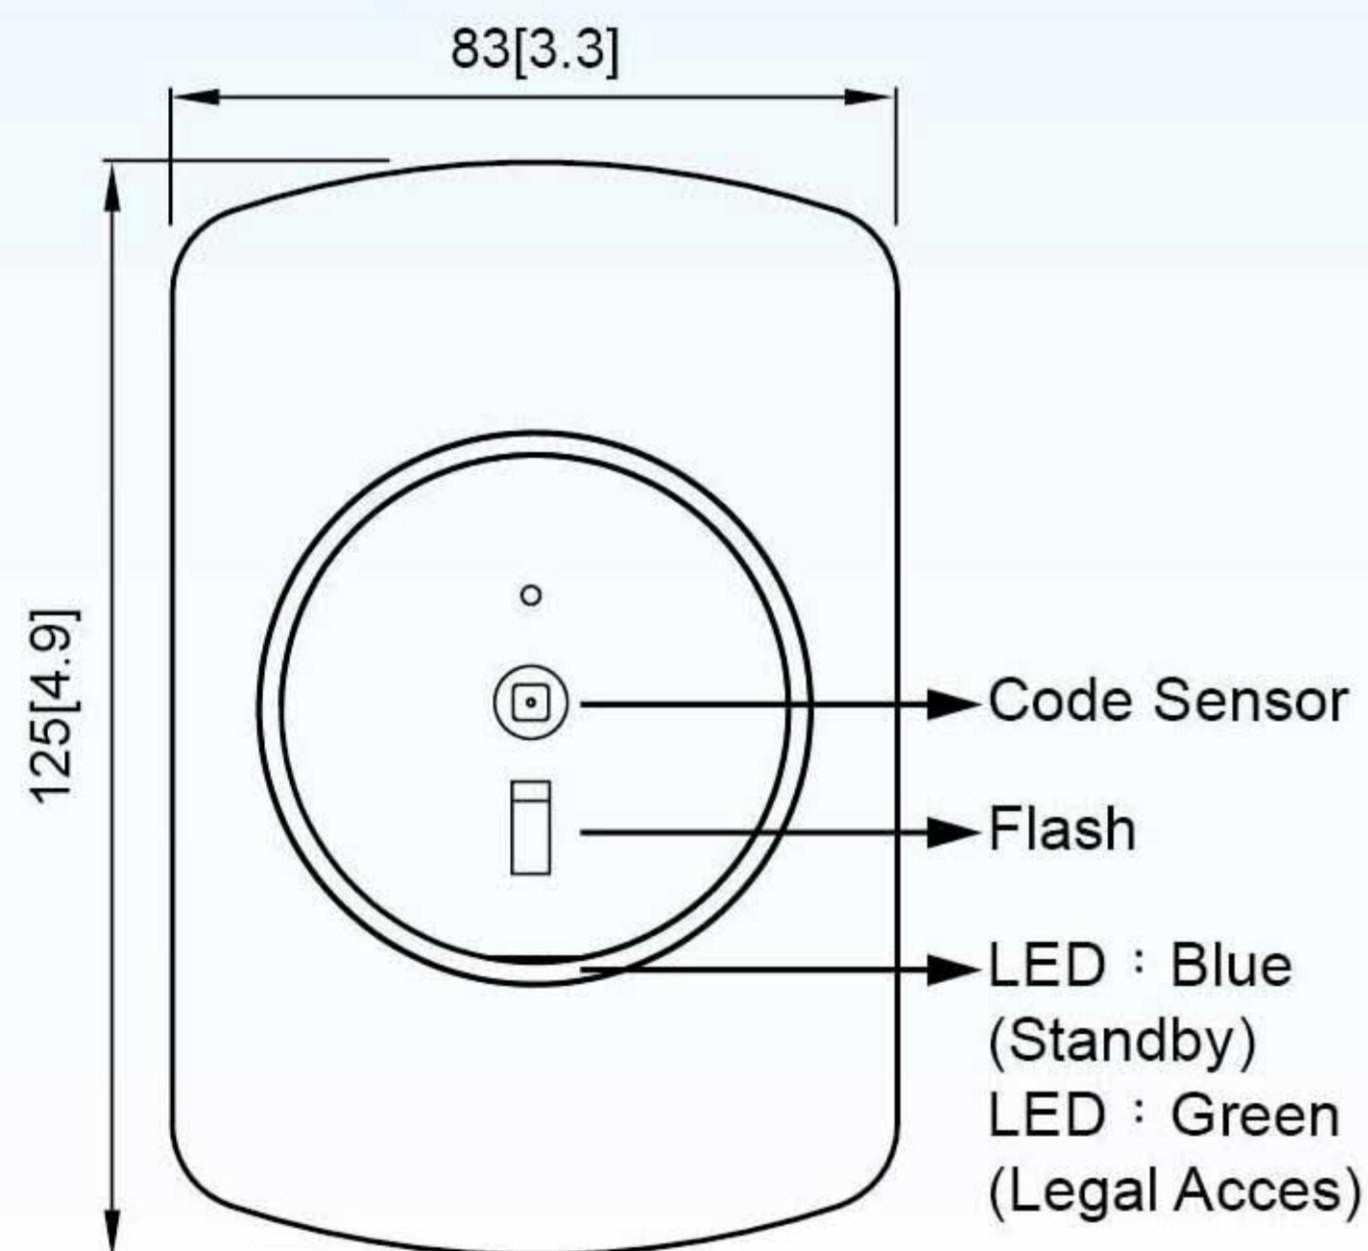

Ordering information

- PQ-510HW** : 125KHz FSK HC & QR Code(Barcode) proximity reader, Wiegand 26&34bits, DC 12V
- PQ-510H2W** : 125KHz FSK HC & QR Code(Barcode) proximity reader, HC(Wiegand 26~37bits, Depending on card), QR code(Wiegand 26&34bits), DC 12V
- PQ-510NW** : 125KHz ASK EM & QR Code(Barcode) proximity reader, Wiegand 26&34bits, DC 12V
- PQ-510M0W34** : 13.56MHz Mifare & QR Code(Barcode) proximity reader, Wiegand 34bits, Read card number: in reverse, DC 12V
- PQ-510M0W34S**

Mifare is a registered trademark of NXP B.V.

MIFARE DESFire is a registered trademark of NXP B.V.

FeliCa is a trademark of Sony Corporation.

PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan

Tel : 886-2-82280198

E-mail : pongee@pongee.com.tw

Fax : 886-2-82280191

Website: <http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!



FM 39868



20200508