



Guard Patrol Tour Terminal

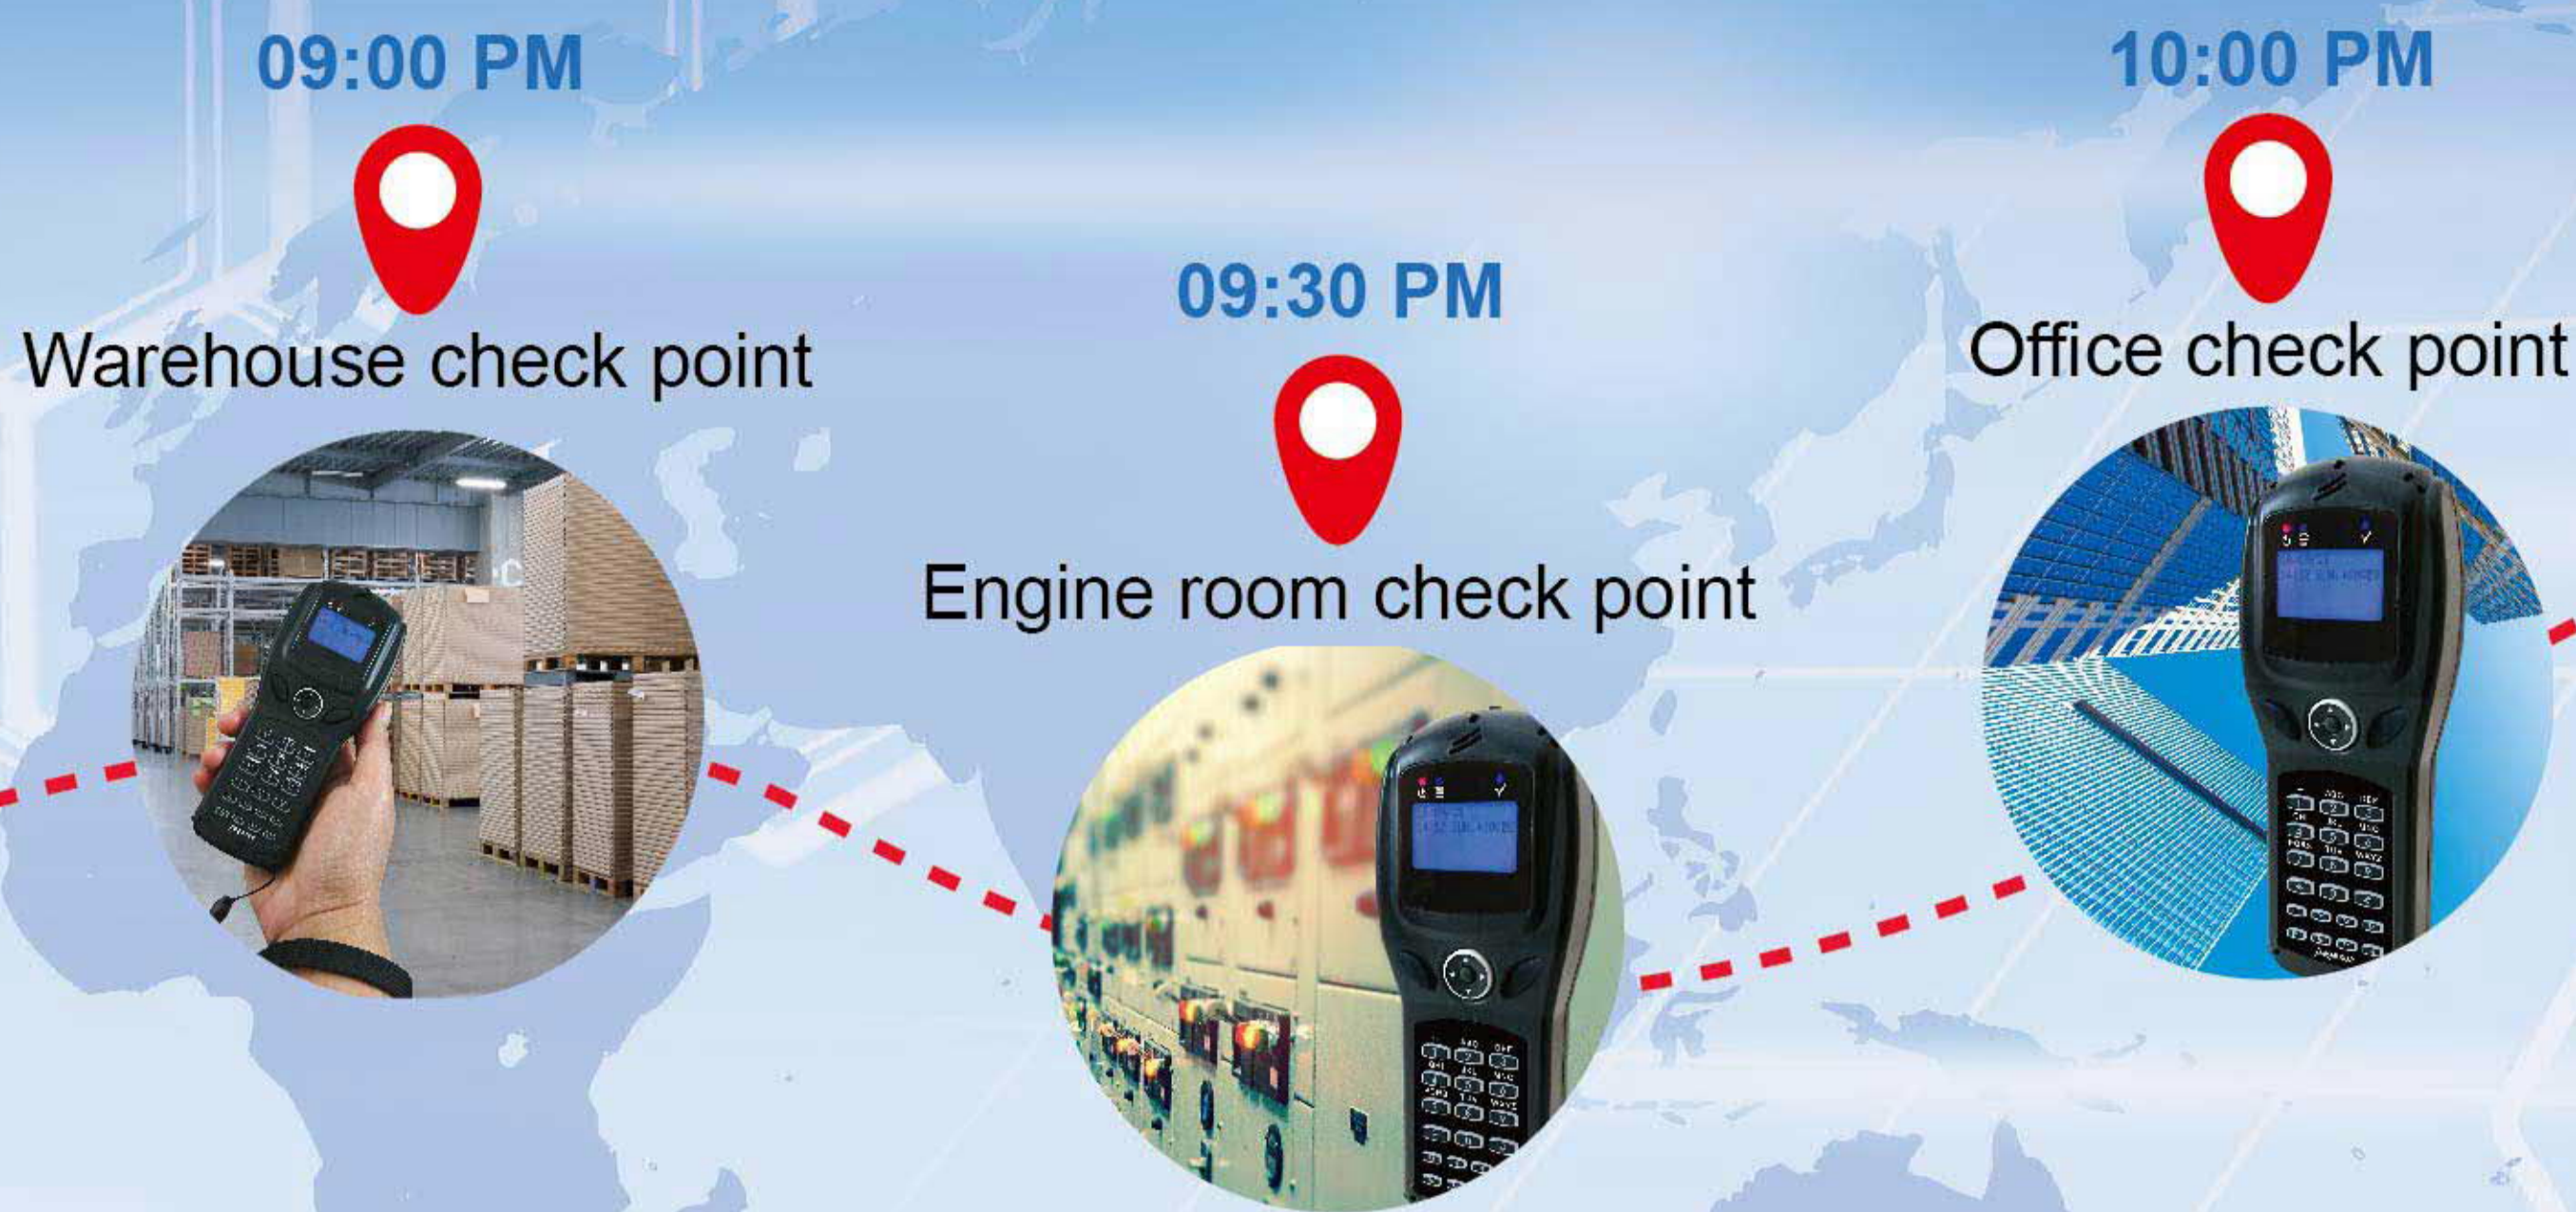

PPT-350SWX

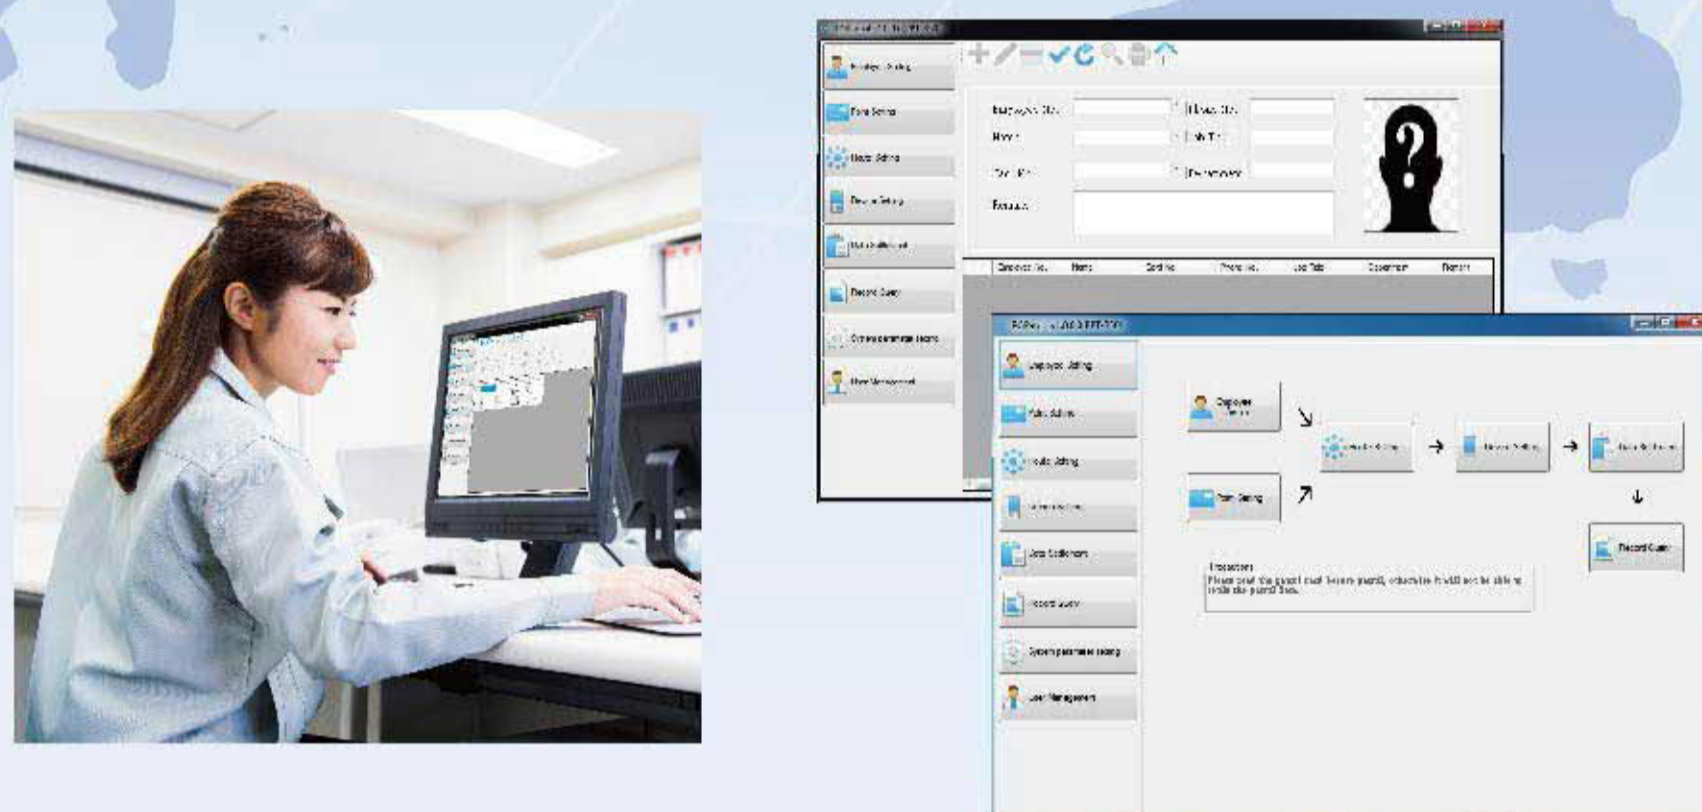


Features

- ◆ One-touch operation: pressing a button for reading ID card.
- ◆ Modern design with multiple function code.
- ◆ With LCD display, real time clock and memory for event recording.
- ◆ Download the data thru. USB interface and then generate the report by the **PATROL MANAGER** software.
- ◆ Battery Embedded.
- ◆ Free SDK available.
- ◆ Modify the card no. display time(01~60sec.)

Specifications

- ◆ RFID Frequency : 125KHz EM / 13.56MHz Mifare
- ◆ Interface : USB
- ◆ Events : 32,000
- ◆ Stand-by time : 20 hours
- ◆ LED : Power and status LED
- ◆ Identity code : Decimal, 8 digits
- ◆ Reading range : Max.8cm(EM) / Max.3.5cm(Mifare)
- ◆ Power supply : USB 5V / 3.7V(Lithium Battery)
- ◆ Operating temperature : -10°C ~ 75°C
- ◆ Storage temperature : -10°C ~ 85°C
- ◆ Dimensions : 151 (L) x 62 (W) x 34 (H) mm
- ◆ Operating system support : Windows XP SP2 / Vista / 7 / 8 / 8.1 / 10
Mac OS 8/9, OS X
Linux/Android
Windows 11(Optional)

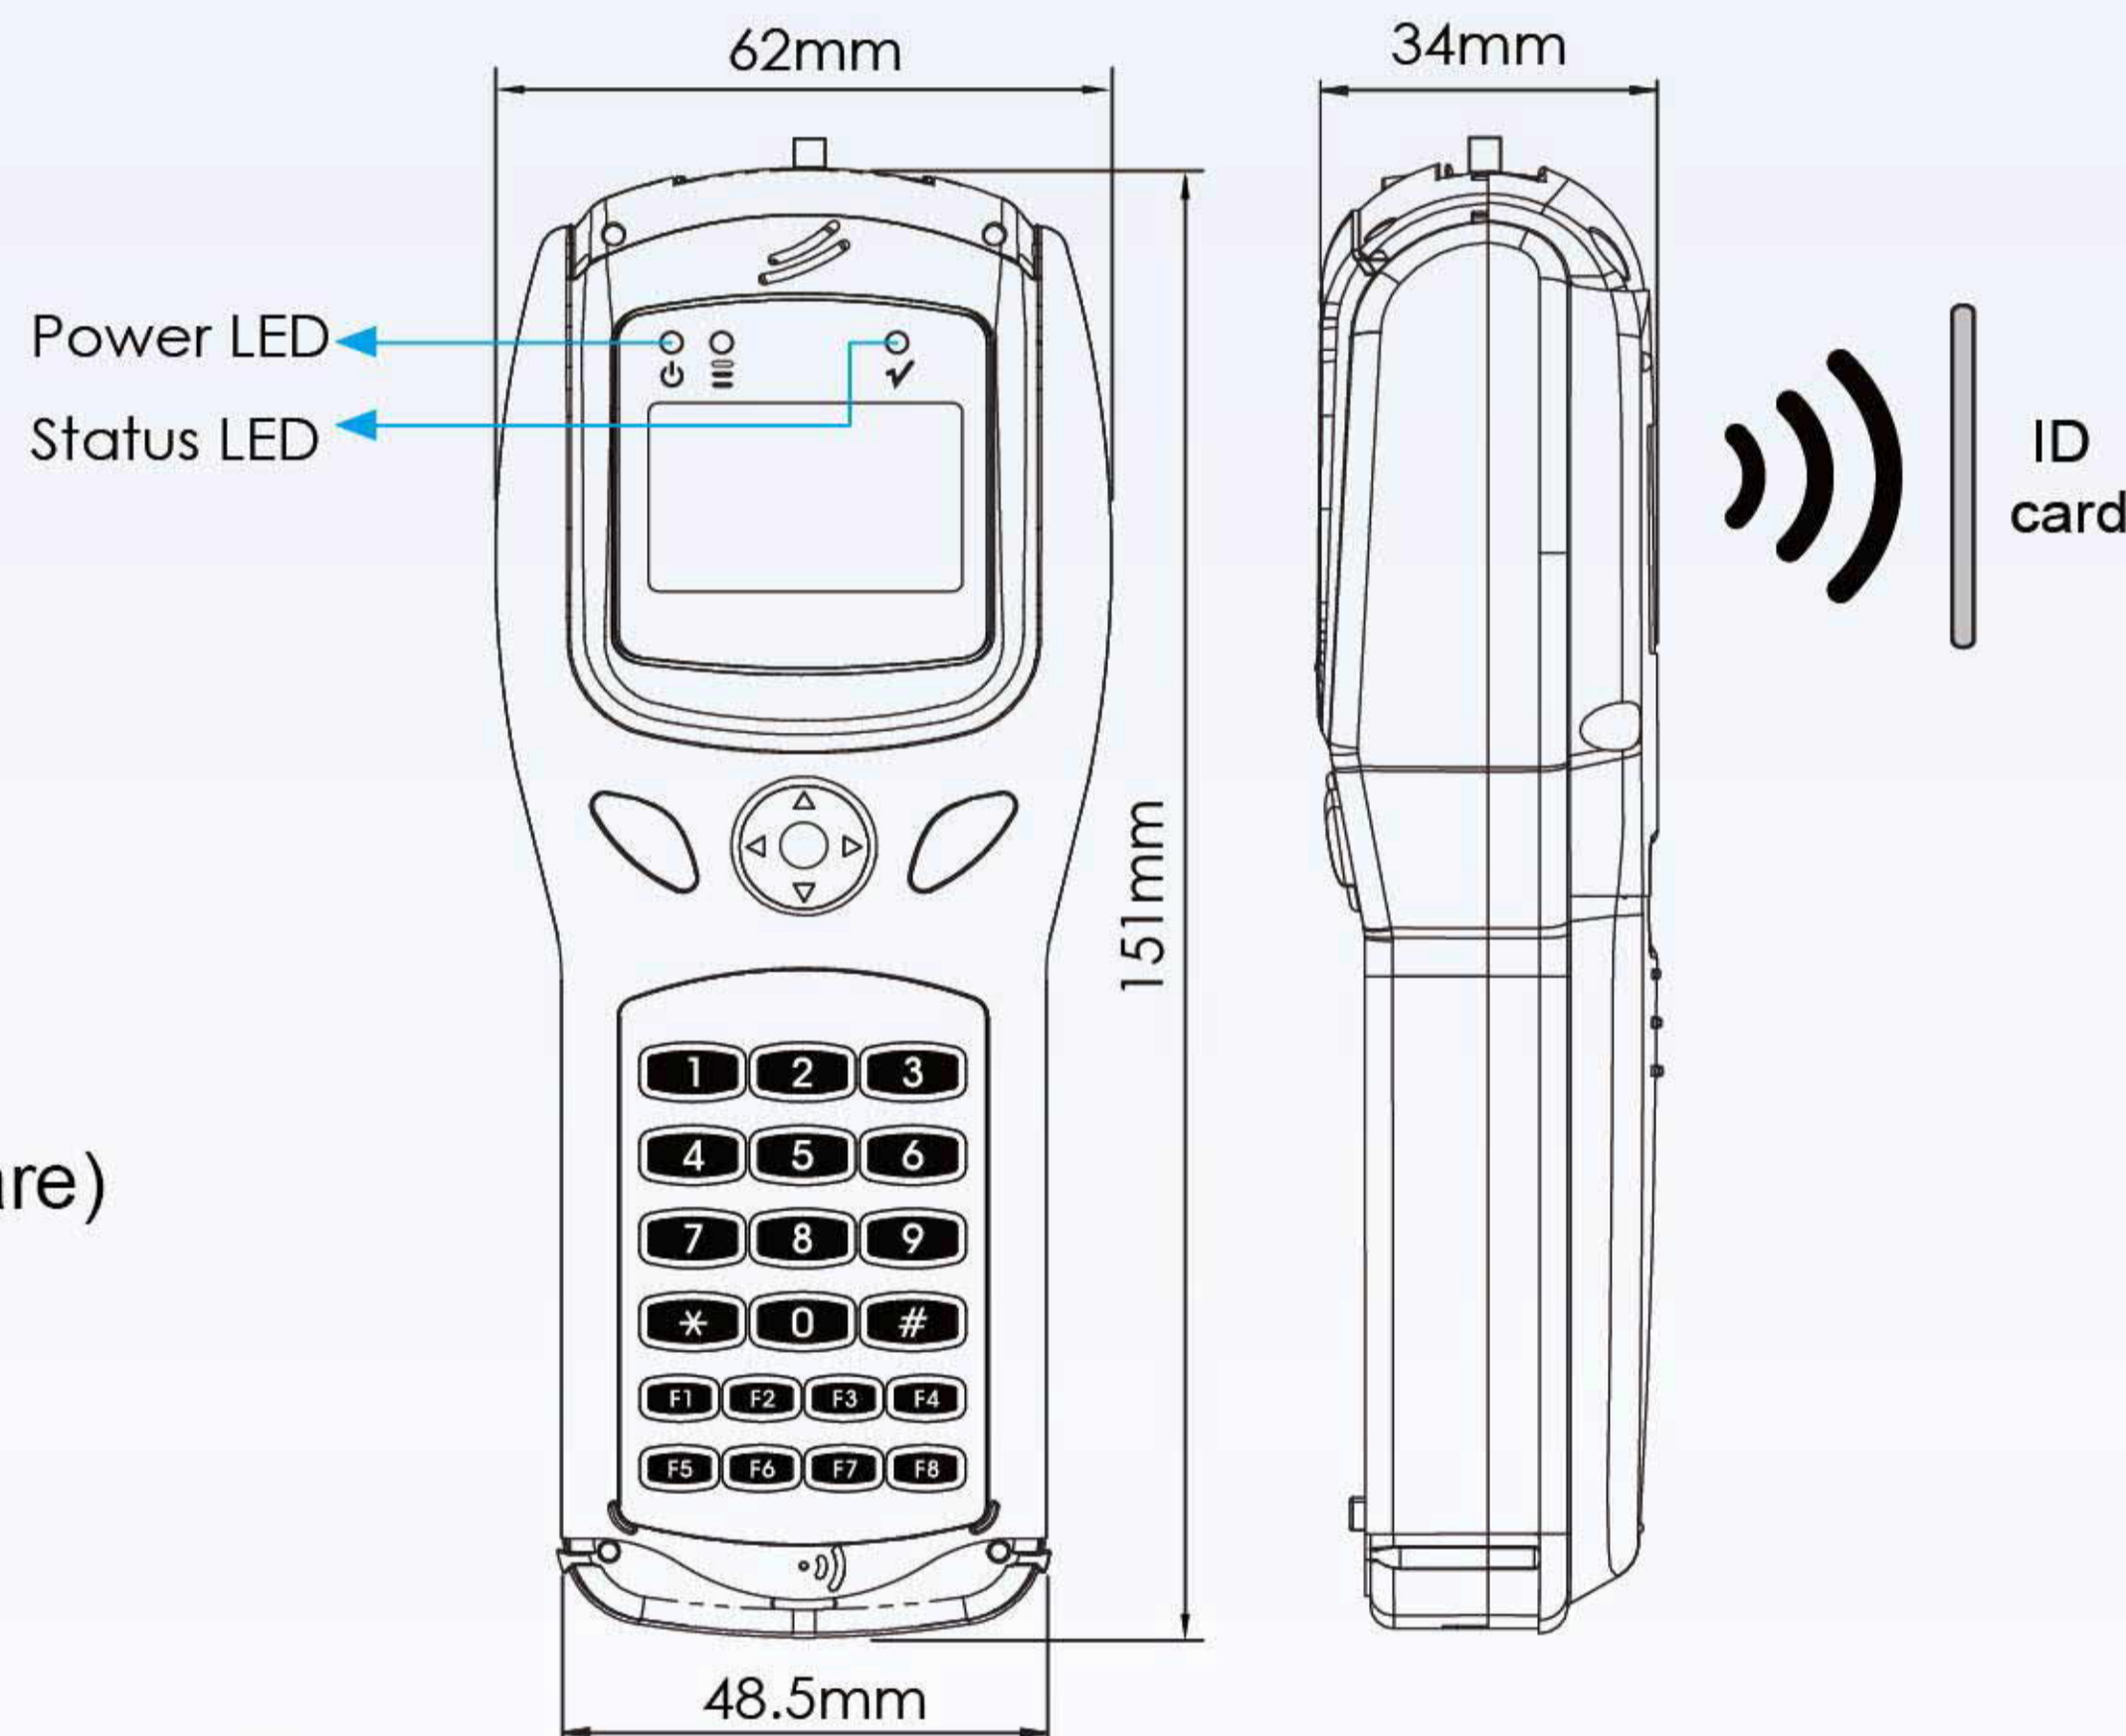

Applications

- ◆ Policeman or Military patrolling
- ◆ Security personnel patrolling
- ◆ Remote equipment inspections/maintenance
- ◆ Goods delivery, transportation management
- ◆ Time attendance
- ◆ Data collector

Accessories - Protective Case

- ◆ Model No. : R-26-350-4
- ◆ Material : Silicone
- ◆ Color : Cadet Green



Ordering information

- PPT-350SWXN** : 125KHz EM Guard Patrol Tour Terminal, 32000 events
- PPT-350SWXM0** : 13.56MHz Mifare Guard Patrol Tour Terminal, 32000 events
- PPT-350SWXM3** : ISO15693 Guard Patrol Tour Terminal, 32000 events

Mifare is a registered trademark of NXP B.V.

PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 235603, Taiwan
Tel : 886-2-82280198 Fax : 886-2-82280191
E-mail : pongee@pongee.com.tw Website: <http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!



20230426