



Fingerprint Time Recording Access Controller

PFP-8033




Features

- Data transfer via USB cable, TCP/IP.
- Optical fingerprint sensor with scratch resistant surface.
- “Tick Tock”, a second, you are either rejected or accepted by PFP-8033.
- Automatically analyze the tiny difference of the latest fingerprints vs. the precious fingerprints and update accordingly to ensure the high accuracy and the optimum speed of fingerprint recognition.
- One in a million attempts, there may be a false acceptance happened. But please remember, it is just a “may”. In other words $FAR \leq 0.0001\%$.

Specification

- Dimensions(L x W x H)mm : 185 x 128 x 45
- Operation mode : On / Offline
- Operation voltage : DC 9V
- Authentication : Fingerprint, PIN, RFID
- Fingerprint verification mode : 1:1, 1:N
- Fingerprint sensor area : 16x14mm
- Fingerprint recognition speed : ≤ 1.2 second
- Fingerprint capacity : 3,000
- Max. ID records : 3,000
- Max. management records : 10,000
- Max. attendance records : 100,000
- Color display : 320x240 dpi
- Display language : : Standard : Chinese, English
Optional: Thai, Spanish, Portuguese, Vietnamese
- Fingerprint update : Smart auto update
- Time bell : 12 Units (Internal and External)
- Door access : Yes
- Backup battery(optional) : About 4 hours of minimal operations
- Data communication channel : USB cable, USB disk, TCP/IP, Wiegand 26 / 34 bit
- Proximity card : EM card / Mifare card (PFP-8033-M)


Data communication

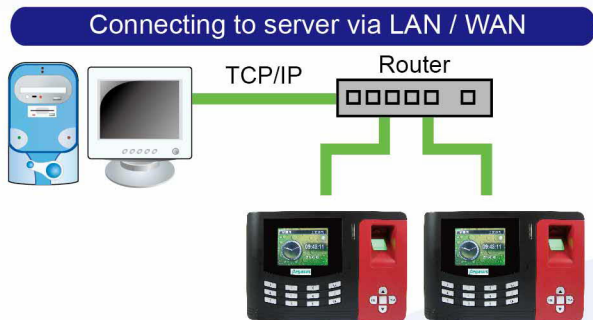

Configuration 1



Configuration 2

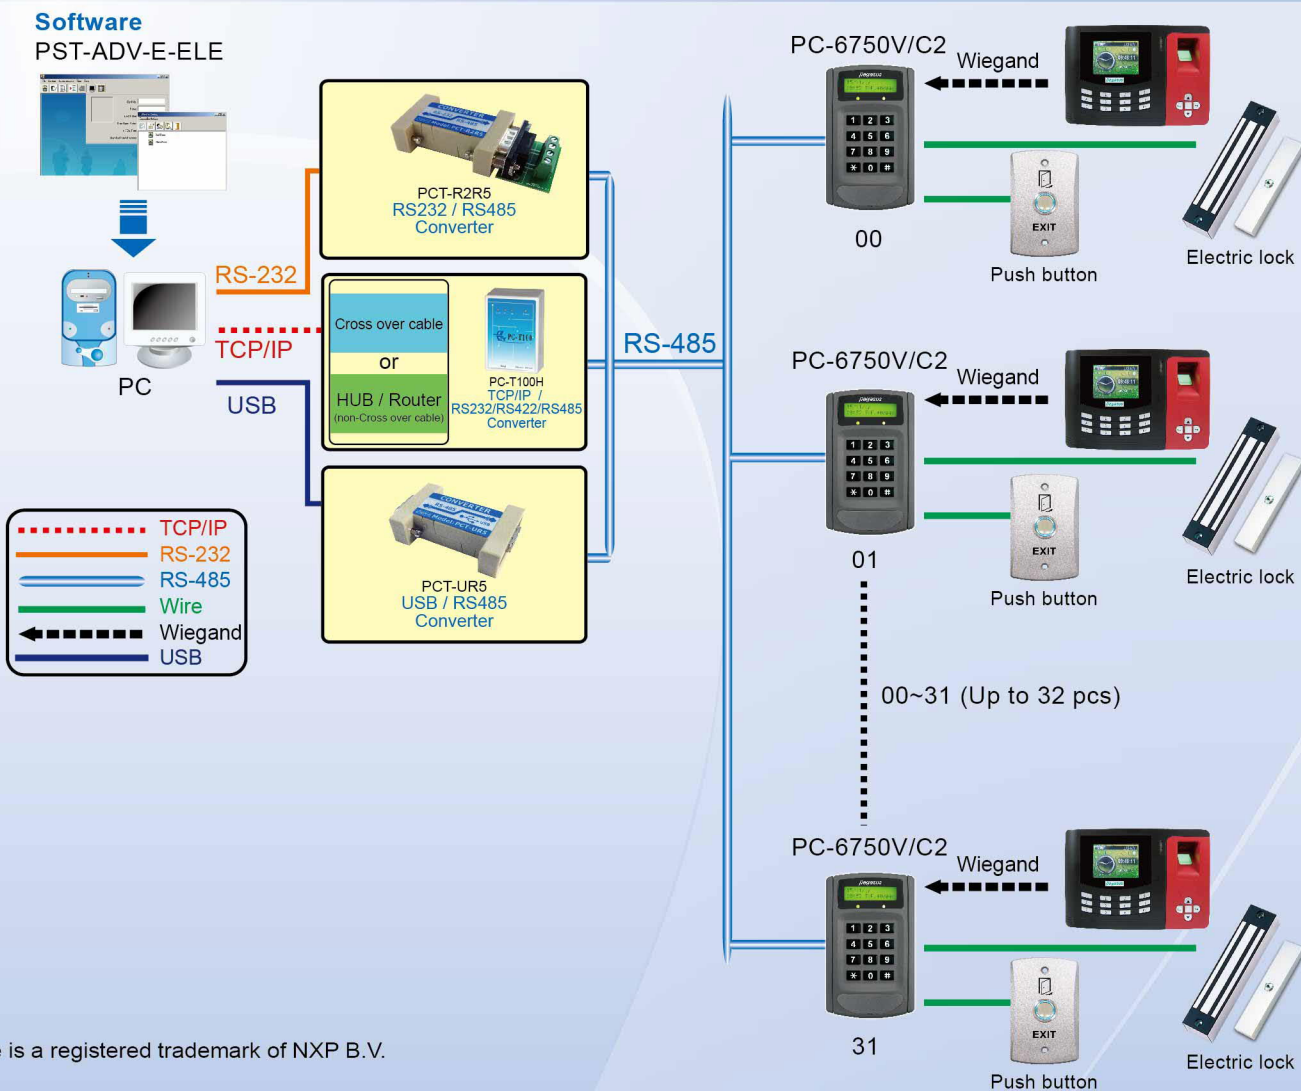

Mifare is a registered trademark of NXP B.V.

PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan

Tel : 886-2-82280198

Fax : 886-2-82280191

E-mail : pongee@pongee.com.tw

Website: <http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!



20200225