



Electromagnetic Lock

PML-120 / PML-121
PML-150 / PML-151


Specifications

Model No.	PML-120	PML-121
Fixed holes	Side	
Magnet size	166(L) x 38.5(W) x 21(H)mm	
Armature size	130(L) x 32(W) x 10(H)mm	
Holding force	265Lbs/120Kgs	
Voltage(DC)/Current	12V/370mA / 24V/185mA	
Door monitoring	NO	YES
Timer (LED)	NO	
Relay dry contact rating	NO	1A 24VDC/AC
Waterproof	NO	
Material	Armature plate(Steel) Lock body(Aluminum alloy)	
Unit weight (Approx.)	1kgs±1%	

Model No.	PML-150	PML-151
Fixed holes	Side	
Magnet size	166(L) x 38.5(W) x 21(H)mm	
Armature size	130(L) x 32(W) x 10(H)mm	
Holding force	330Lbs/150Kgs	
Voltage(DC)/Current	12V/370mA / 24V/185mA	
Door monitoring	NO	YES
Timer (LED)	NO	
Relay dry contact rating	NO	1A 24VDC/AC
Waterproof	NO	
Material	Armature plate(Steel) Lock body(Aluminum alloy)	
Unit weight (Approx.)	1kgs±1%	

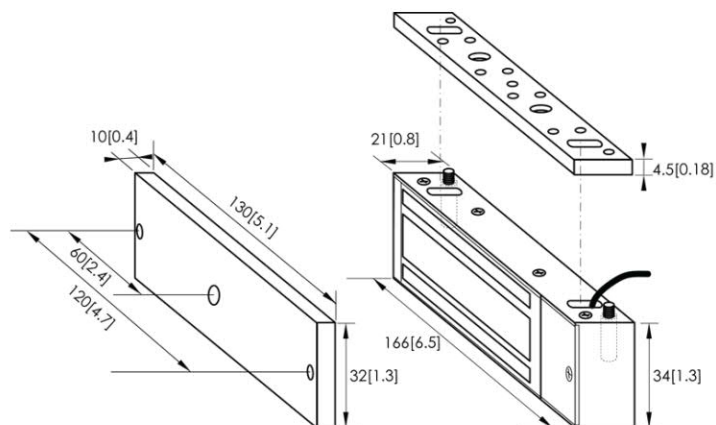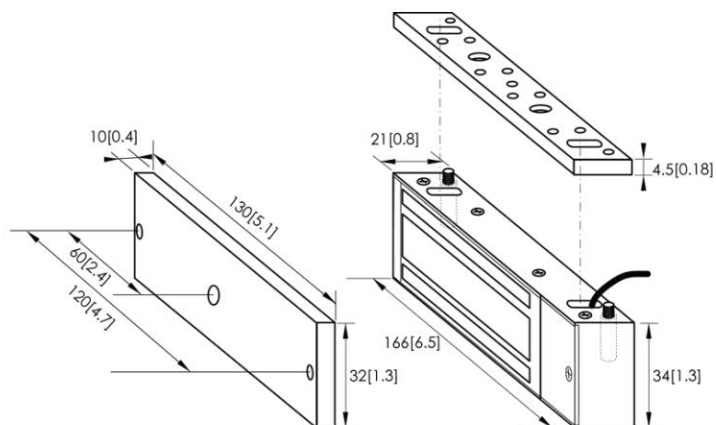

Accessories

L type fixed bracket

L & Z fixed bracket

U type bracket

Model No.	PG-BLO151	PG-BLZ151	PG-BUO150
Appearance			
Operation	PML-120 / PML-121 PML-150 / PML-151		
Dimensions (LxWxH)mm	165 x 29 x 43	166 x 43(W1) x 50(W2) x 50	140 x 30 x 45
Applications	For aluminum steel or wooden door, brass door, glass door with frame		Glass door without frame Glass thickness: Max.13mm

Electromagnetic Lock PML-1100 / PML-1101 PML-2100 / PML-2101

Electromagnetic Lock



Specifications



Model No.	PML-1100	PML-1101
Fixed holes	Side	
Magnet size	250(L) x 47(W) x 26(H)mm	
Armature size	185(L) x 38(W) x 11(H)mm	
Holding force	600Lbs/270Kgs	
Voltage(DC)/Current	12V/800mA / 24V/400mA	12V/500mA / 24V/250mA
Door monitoring	NO	YES
Timer (LED)	Power LED	YES
Relay dry contact rating	NO	500mA 24VDC/AC
Waterproof	NO	
Material	Armature plate(Steel) Lock body(Aluminum alloy)	

Unit weight (Approx.) : 2kgs±1%

Model No.	PML-2100	PML-2101
Fixed holes	Side	
Magnet size	266(L) x 73(W) x 40(H)mm	
Armature size	185(L) x 61(W) x 16(H)mm	
Holding force	1200Lbs/540Kgs	
Voltage(DC)/Current	12V/500mA / 24V/250mA	
Door monitoring	NO	YES
Timer (LED)	Power LED	YES
Relay dry contact rating	NO	500mA 24VDC/AC
Waterproof	NO	
Material	Armature plate(Steel) Lock body(Aluminum alloy)	

Unit weight (Approx.) : 5kgs±1%

Dimensions mm[inch]

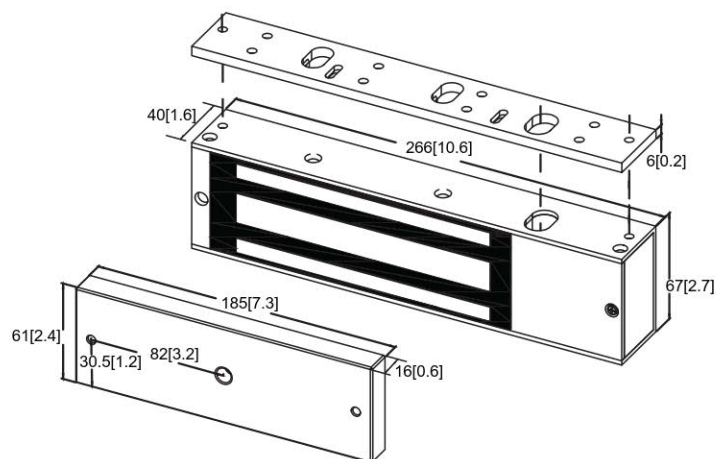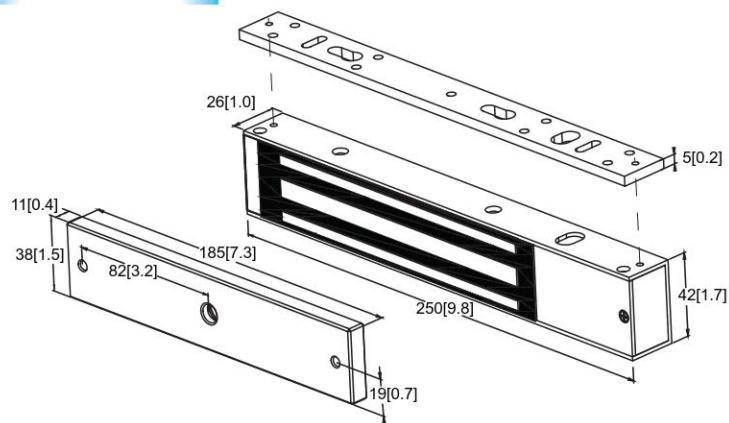

Accessories

L type fixed bracket

L & Z fixed bracket

U type bracket

Model No.	PG-BLO110A	PG-BLO210A	PG-BLZ110A	PG-BLZ210A	PG-BUO110
Appearance					
Operation	PML-1100 PML-1101	PML-2100 PML-2101	PML-1100 PML-1101	PML-2100 PML-2101	PML-1100 PML-1101
Dimensions (LxWxH)mm	250 x 33 x 51	266 x 48 x 75	190 x 50(W1) x 50(W2) x 50	190 x 72(W1) x 72(W2) x 72	190 x 30 x 45
Applications	For aluminum steel or wooden door, brass door, glass door with frame				Glass door without frame Glass thickness: Max.13mm

Electromagnetic Lock PML-1101R/PML-1101R4C PML-2101R/PML-2101R4C



Specifications

Model No.	:	PML-1101R
Fixed holes	:	Side
Magnet size	:	250(L) x 47(W) x 26(H)mm
Armature size	:	185(L) x 38(W) x 11(H)mm
Holding force	:	600Lbs/270Kgs
Voltage(DC)/Current	:	12V/500mA / 24V/250mA
Door monitoring	:	YES
Timer (LED)	:	YES
Relay dry contact rating	:	500mA 24VDC/AC
Waterproof	:	NO
Material	:	Armature plate(Steel) Lock body(Aluminum alloy)
Unit weight (Approx.)	:	2kgs±1%
Features	:	*Remote release control ranges up to 10 meters. *With learning mode button for memory up to 40 pieces transmitter ID's. *Built-in receiver prevents additional installation and wiring. *Optional with 4-button transmitter that supports individually control up to 4 electromagnetic locks.

(Model No. PML-1101R4C)

Model No.	:	PML-2101R
Fixed holes	:	Side
Magnet size	:	266(L) x 73(W) x 40(H)mm
Armature size	:	185(L) x 61(W) x 16(H)mm
Holding force	:	1200Lbs/540Kgs
Voltage(DC)/Current	:	12V/500mA / 24V/250mA
Door monitoring	:	YES
Timer (LED)	:	YES
Relay dry contact rating	:	500mA 24VDC/AC
Waterproof	:	NO
Material	:	Armature plate(Steel) Lock body(Aluminum alloy)
Unit weight (Approx.)	:	5kgs±1%
Features	:	*Remote release control ranges up to 10 meters. *With learning mode button for memory up to 40 pieces transmitter ID's. *Built-in receiver prevents additional installation and wiring. *Optional with 4-button transmitter that supports individually control up to 4 electromagnetic locks.

(Model No. PML-2101R4C)



Receiver inside



Electromagnetic Lock PGL-180 / PGL-180F




Electromagnetic Lock

Specifications

Model No.	: PGL-180
Fixed holes	: Front(For In-swing door)
Magnet size	: 164(L) x 35(W) x 26(H)mm
Armature size	: 130(L) x 32(W) x 10(H)mm
Holding force	: 400Lbs/180Kgs
Voltage(DC)/Current	: 12V/370mA / 24V/185mA
Door monitoring	: NO
Timer (LED)	: NO
Relay dry contact rating	: NO
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 1.5kgs±1%


Dimensions mm[inch]

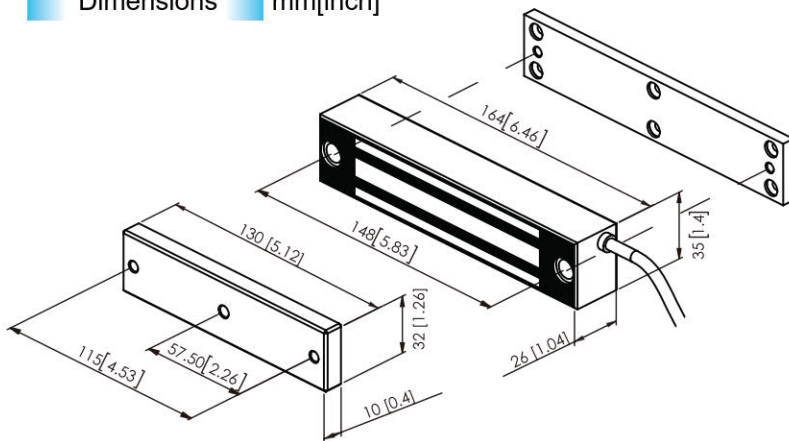

L type fixed bracket

Model No.	: PGL-180F
Fixed holes	: Front(For Out-swing door)
Magnet size	: 164(L) x 35(W) x 26(H)mm
Armature size	: 130(L) x 32(W) x 10(H)mm
Holding force	: 400Lbs/180Kgs
Voltage(DC)/Current	: 12V/370mA / 24V/185mA
Door monitoring	: NO
Timer (LED)	: NO
Relay dry contact rating	: NO
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 1.5kgs±1%

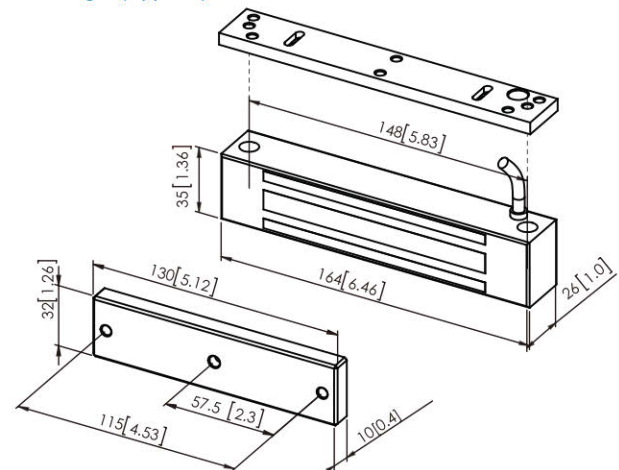

L & Z fixed bracket

Accessories

Model No.	PG-BLO180	PG-BLZ180
Appearance		
Operation	PGL-180 / PGL-180F	PGL-180 / PGL-180F
Dimensions (LxWxH)mm	165 x 29 x 43	166 x 43(W1) x 50(W2) x 50
Applications	For aluminum steel or wooden door, brass door, glass door with frame	

Electromagnetic Lock PGL-271/ PGL-401



Specifications



Model No.	PGL-271
Fixed holes	Side(For In/Out-swing door)
Magnet size	200(L) x 40(W) x 26(H)mm
Armature size	185(L) x 38(W) x 12(H)mm
Holding force	600Lbs/270Kgs
Voltage(DC)/Current	12V/500mA / 24V/250mA
Door monitoring	Yes
Timer (LED)	NO
Relay dry contact rating	NO
Waterproof	Yes
Material	Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 2.3kgs±1%

Model No.	PGL-401
Fixed holes	Side(For In/Out-swing door)
Magnet size	223(L) x 47(W) x 29(H)mm
Armature size	185(L) x 47(W) x 13(H)mm
Holding force	800Lbs/360Kgs
Voltage(DC)/Current	12V/420mA / 24V/210mA
Door monitoring	Yes
Timer (LED)	NO
Relay dry contact rating	NO
Waterproof	Yes
Material	Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 3kgs±1%

Dimensions mm[inch]

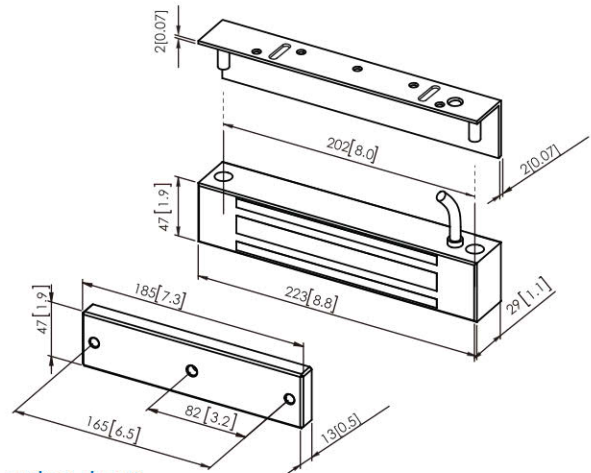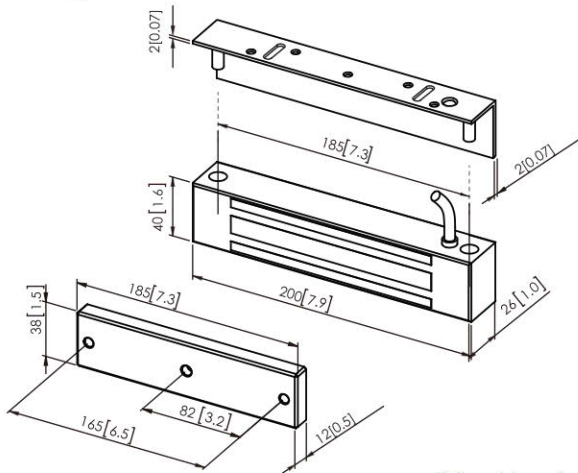

Z fixed bracket(For In-swing door)

Accessories

Model No.	PG-BOZ110A
Appearance	
Operation	PGL-271/ PGL-401
Dimensions (LxWxH)mm	190x 50(W1) x 50(W2) x 50
Applications	For aluminum steel or wooden door, brass door, glass door with frame

Electromagnetic Lock PGL-600 / PGL-600F



Electromagnetic Lock

Specifications



Model No.	: PGL-600
Fixed holes	: Front(For In-swing door)
Magnet size	: 203(L) x 63(W) x 42(H)mm
Armature size	: 185(L) x 61(W) x 16(H)mm
Holding force	: 1300Lbs/600Kgs
Voltage(DC)/Current	: 12V/500mA / 24V/250mA
Door monitoring	: YES
Timer (LED)	: NO
Relay dry contact rating	: 1A 24VDC/AC
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 5kgs±1%

Model No.	: PGL-600F
Fixed holes	: Front(For Out-swing door)
Magnet size	: 225(L) x 65(W) x 42(H)mm
Armature size	: 180(L) x 61(W) x 16(H)mm
Holding force	: 1300Lbs/600Kgs
Voltage(DC)/Current	: 12V/500mA / 24V/250mA
Door monitoring	: YES
Timer (LED)	: NO
Relay dry contact rating	: 1A 24VDC/AC
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 5kgs±1%

Dimensions mm[inch]

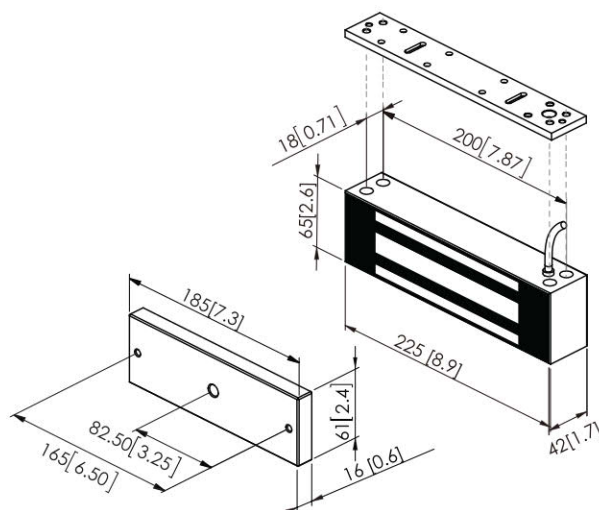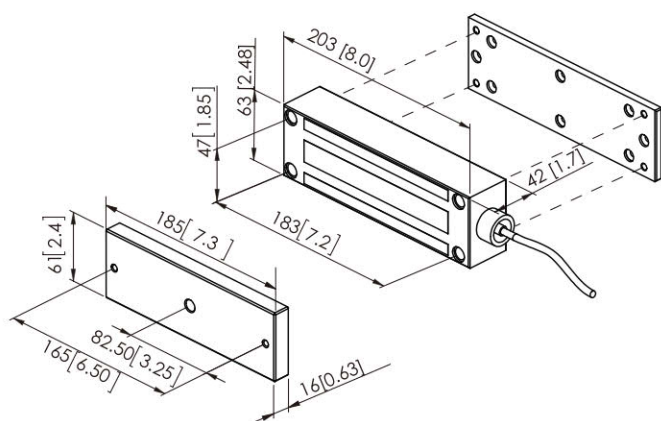

Accessories

L type fixed bracket

Model No.	PG-BLO600	PG-BLO600F
Appearance		
Operation	PGL-600	PGL-600F
Dimensions (LxWxH)mm	205 x 48 x 75	225 x 48 x 75

L & Z fixed bracket

Model No.	PG-BLZ600	PG-BLZ600F
Appearance		
Operation	PGL-600	PGL-600F
Dimensions (LxWxH)mm	190 x 72(W1) x 72(W2) x 72	190 x 72(W1) x 72(W2) x 72

For aluminum steel or wooden door, brass door, glass door with frame

Electromagnetic Lock PML-3100 / PML-3101 PML-4100 / PML-4101

Double Door



Double Door



Specifications



Model No.	PML-3100	PML-3101
Fixed holes		Side
Magnet size	500(L) x 47(W) x 26(H)mm	
Armature size	185(L) x 38(W) x 11(H)mm	
Holding force	600Lbs x 2/270Kgs x 2	
Voltage(DC)/Current	12V/1000mA / 24V/500mA	
Door monitoring	NO	YES
Timer (LED)	Power LED	YES
Relay dry contact rating	NO	500mA 24VDC/AC
Waterproof	NO	
Material	Armature plate(Steel) Lock body(Aluminum alloy)	

Unit weight (Approx.) : 4kgs±1%

Model No.	PML-4100	PML-4101
Fixed holes		Side
Magnet size	532(L) x 73(W) x 40(H)mm	
Armature size	185(L) x 61(W) x 16(H)mm	
Holding force	1200Lbs x 2/540Kgs x 2	
Voltage(DC)/Current	12V/1000mA / 24V/500mA	
Door monitoring	NO	YES
Timer (LED)	Power LED	YES
Relay dry contact rating	NO	500mA 24VDC/AC
Waterproof	NO	
Material	Armature plate(Steel) Lock body(Aluminum alloy)	

Unit weight (Approx.) : 10kgs±1%

Dimensions mm[inch]

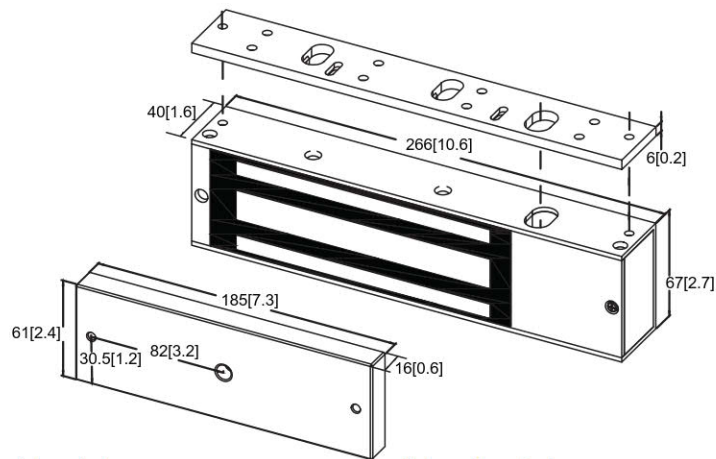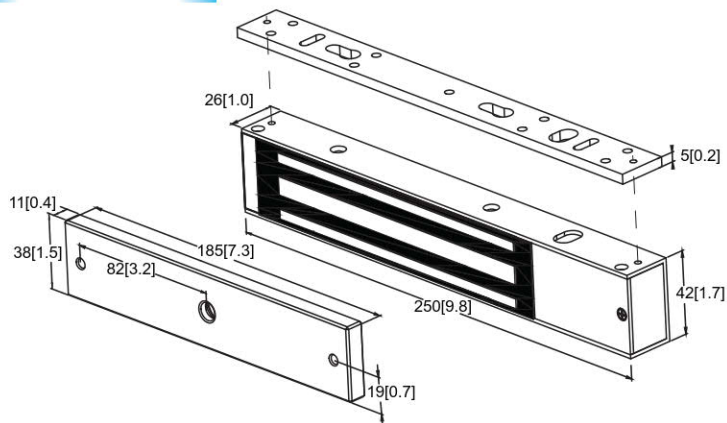

Accessories

L type fixed bracket

L & Z fixed bracket

U type bracket

Model No.	PG-BLO110A x 2	PG-BLO210A x 2	PG-BLZ110A x 2	PG-BLZ210A x 2	PG-BUO110 x 2
Appearance					
Operation	PML-3100 PML-3101	PML-4100 PML-4101	PML-3100 PML-3101	PML-4100 PML-4101	PML-3100 PML-3101
Dimensions (LxWxH)mm	250 x 33 x 51	266 x 48 x 75	190 x 50(W1) x 50(W2) x 50	190 x 72(W1) x 72(W2) x 72	190 x 30 x 45
Applications	For aluminum steel or wooden door, brass door, glass door with frame				Glass door without frame Glass thickness: Max.13mm