


Electromagnetic Lock PGL-180 / PGL-180F

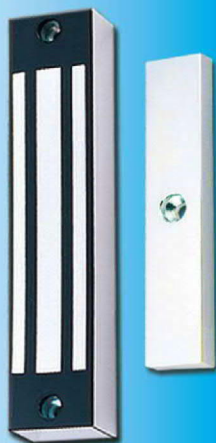

Electromagnetic Lock

Specifications



Model No.	PGL-180
Fixed holes	Front(For In-swing door)
Magnet size	164(L) x 35(W) x 26(H)mm
Armature size	130(L) x 32(W) x 10(H)mm
Holding force	400Lbs/180Kgs
Voltage(DC)/Current	12V/370mA / 24V/185mA
Door monitoring	NO
Timer (LED)	NO
Relay dry contact rating	NO
Waterproof	Yes
Material	Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 1.5kgs±1%

Model No.	PGL-180F
Fixed holes	Front(For Out-swing door)
Magnet size	164(L) x 35(W) x 26(H)mm
Armature size	130(L) x 32(W) x 10(H)mm
Holding force	400Lbs/180Kgs
Voltage(DC)/Current	12V/370mA / 24V/185mA
Door monitoring	NO
Timer (LED)	NO
Relay dry contact rating	NO
Waterproof	Yes
Material	Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 1.5kgs±1%

Dimensions mm[inch]

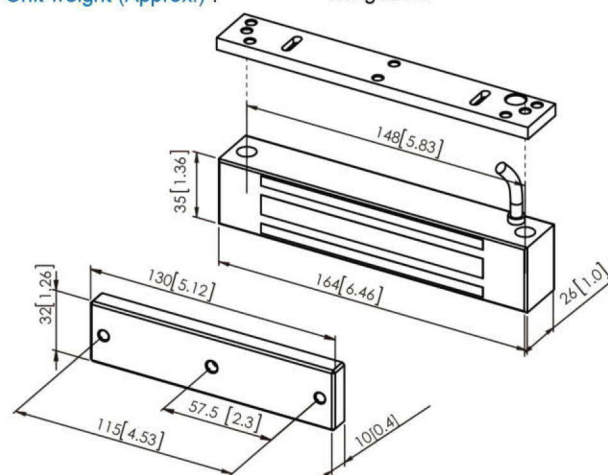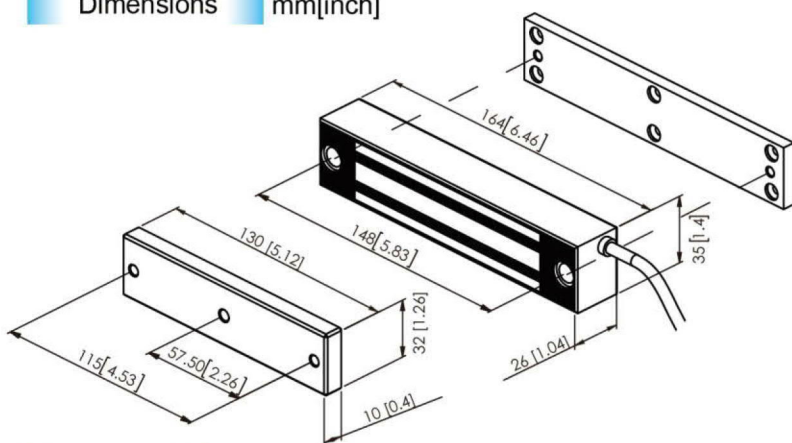

Accessories

L type fixed bracket

L & Z fixed bracket

Model No.	PG-BLO180	PG-BLZ180
Appearance		
Operation	PGL-180 / PGL-180F	PGL-180 / PGL-180F
Dimensions (LxWxH)mm	165 x 29 x 43	166 x 43(W1) x 50(W2) x 50
Applications	For aluminum steel or wooden door, brass door, glass door with frame	

Electromagnetic Lock PGL-271/ PGL-401



Specifications



Model No.	: PGL-271
Fixed holes	: Side(For In/Out-swing door)
Magnet size	: 200(L) x 40(W) x 26(H)mm
Armature size	: 185(L) x 38(W) x 12(H)mm
Holding force	: 600Lbs/270Kgs
Voltage(DC)/Current	: 12V/500mA / 24V/250mA
Door monitoring	: Yes
Timer (LED)	: NO
Relay dry contact rating	: NO
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 2.3kgs±1%

Model No.	: PGL-401
Fixed holes	: Side(For In/Out-swing door)
Magnet size	: 223(L) x 47(W) x 29(H)mm
Armature size	: 185(L) x 47(W) x 13(H)mm
Holding force	: 800Lbs/360Kgs
Voltage(DC)/Current	: 12V/420mA / 24V/210mA
Door monitoring	: Yes
Timer (LED)	: NO
Relay dry contact rating	: NO
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 3kgs±1%

Dimensions mm[inch]

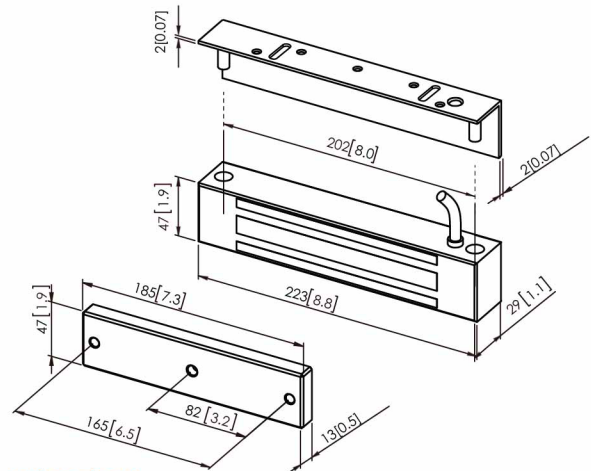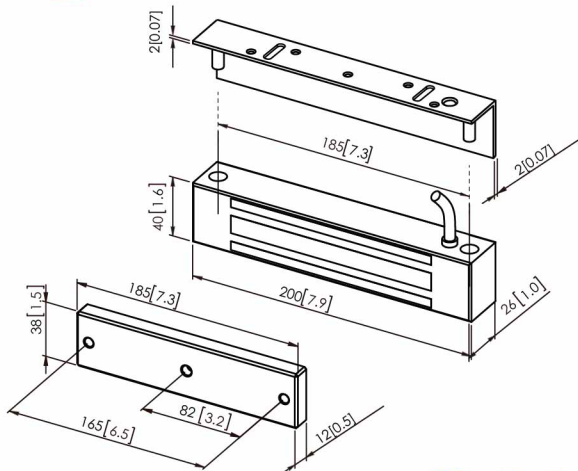

Z fixed bracket(For In-swing door)

Accessories

Model No.	PG-BOZ110A
Appearance	
Operation	PGL-271/ PGL-401
Dimensions (LxWxH)mm	190x 50(W1) x 50(W2) x 50
Applications	For aluminum steel or wooden door, brass door, glass door with frame

Electromagnetic Lock PGL-600 / PGL-600F



Electromagnetic Lock

Specifications



Model No.	: PGL-600
Fixed holes	: Front(For In-swing door)
Magnet size	: 203(L) x 63(W) x 42(H)mm
Armature size	: 185(L) x 61(W) x 16(H)mm
Holding force	: 1300Lbs/600Kgs
Voltage(DC)/Current	: 12V/500mA / 24V/250mA
Door monitoring	: YES
Timer (LED)	: NO
Relay dry contact rating	: 1A 24VDC/AC
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 5kgs±1%

Model No.	: PGL-600F
Fixed holes	: Front(For Out-swing door)
Magnet size	: 225(L) x 65(W) x 42(H)mm
Armature size	: 180(L) x 61(W) x 16(H)mm
Holding force	: 1300Lbs/600Kgs
Voltage(DC)/Current	: 12V/500mA / 24V/250mA
Door monitoring	: YES
Timer (LED)	: NO
Relay dry contact rating	: 1A 24VDC/AC
Waterproof	: Yes
Material	: Armature plate(Steel) Lock body(Stainless steel)

Unit weight (Approx.) : 5kgs±1%

Dimensions mm[inch]

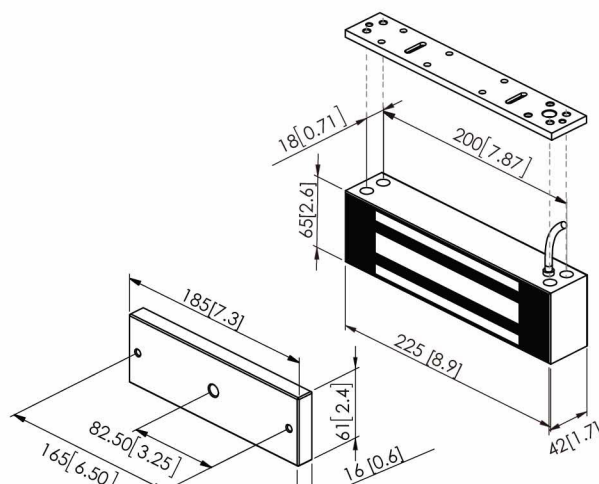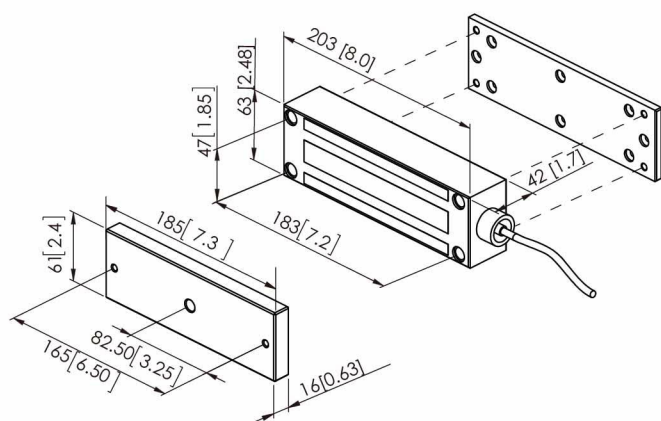

Accessories

L type fixed bracket

Model No.	PG-BLO600	PG-BLO600F
Appearance		
Operation	PGL-600	PGL-600F
Dimensions (LxWxH)mm	205 x 48 x 75	225 x 48 x 75

L & Z fixed bracket

Model No.	PG-BLZ600	PG-BLZ600F
Appearance		
Operation	PGL-600	PGL-600F
Dimensions (LxWxH)mm	190 x 72(W1) x 72(W2) x 72	190 x 72(W1) x 72(W2) x 72

For aluminum steel or wooden door, brass door, glass door with frame